



# Extra Heavy Duty Gusseted Wire Rope Thimble (Imported)

CATALOG (SKU) NUMBER: R-THIM

- Made From Hot Rolled Mild Steel.
- Hot Dipped Galvanized.
- Meets Performance Requirements of Federal Spec FF-T-276B Type III.

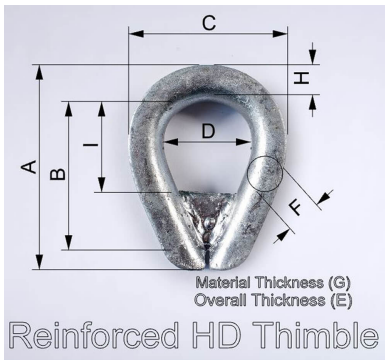

hd rein thimble

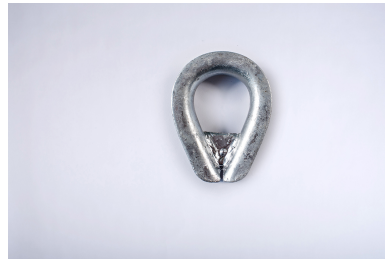

Galvanized Reinforced Wire  
Rope Thimble

## Product Specifications

| EXTRA HEAVY DUTY GUSSETED GALVANIZED WIRE ROPE THIMBLE (IMPORTED) |                              |                      |                 |        |        |        |        |        |       |        |              |                    |
|---|------------------------------|----------------------|-----------------|--------|--------|--------|--------|--------|-------|--------|--------------|--------------------|
| PART NUMBER   | WIRE ROPE DIAMETER SIZE (IN) | WEIGHT PER 100 (LBS) | DIMENSIONS (IN) |        |        |        |        |        |       |        |              | TOLERANCE (+/- IN) |
|   |                              |                      | A               | B      | C      | D      | E      | F      | G     | H      | I            |                    |
| I51155  | 3/8                          | 21.60                | 2.8800          | 2.1200 | 2.1200 | 1.1200 | 0.6300 | .4100  | .1100 | .3900  | .8100 (+/-)  | .2500              |
| I51157  | 7/16                         | 37.00                | 3.2800          | 2.4800 | 2.3850 | 1.2140 | 0.7270 | .4450  | .1500 | .4800  | 1.100 (+/-)  | .2500              |
| I51160  | 1/2                          | 51.00                | 3.6200          | 2.7500 | 2.7500 | 1.5000 | 0.8900 | .5900  | .1500 | .5000  | 1.1200 (+/-) | .2500              |
| I51165  | 5/8                          | 75.70                | 4.2500          | 3.2500 | 3.1200 | 1.7500 | 1.0000 | 0.6600 | .1600 | .5300  | 1.2500 (+/-) | .3750              |
| I51170  | 3/4                          | 158.10               | 5.0000          | 3.7500 | 3.8100 | 2.0000 | 1.2200 | 0.7800 | .2200 | .6900  | 1.5000 (+/-) | .3750              |
| I51175  | 7/8                          | 177.80               | 5.5000          | 4.2500 | 4.2500 | 2.2500 | 1.3800 | 0.9400 | .2200 | .7800  | 1.6300 (+/-) | .3750              |
| I51180  | 1                            | 313.90               | 6.1200          | 4.5000 | 4.7500 | 2.5000 | 1.5600 | 1.0600 | .2500 | .8800  | 1.8800 (+/-) | .3750              |
| I51185  | 1-1/8-1-1/4                  | 400.00               | 7.0000          | 5.1200 | 5.8800 | 2.8800 | 1.8800 | 1.3100 | .2500 | 1.2500 | 2.1300 (+/-) | .5000              |
| I51190  | 1-1/4-1-3/8                  | 787.00               | 8.8750          | 6.1250 | 6.5000 | 3.6250 | 2.3625 | 1.4500 | .3500 | 1.2750 | 2.5000 (+/-) | .5000              |
| I51195  | 1-3/8-1-1/2                  | 1294.80              | 9.0000          | 6.2500 | 7.1200 | 3.5000 | 2.6200 | 1.5600 | .5000 | 1.3100 | 2.5000 (+/-) | .5000              |