

Alloy Master Link With Large Sub Link Grade 100 (Peerless)

CATALOG (SKU) NUMBER: PEER-8452

- For construction of double, triple, and quadruple rigging slings.
- For use with grade 80 or 100 chain slings, wire rope, and synthetic assemblies.
- Design factor is 4:1.
- Meet or exceed all requirements of ASME B30.26.
- Proof tested in accordance with ASTM A952.
- Available in Chinese import or U.S.A. domestic upon request.

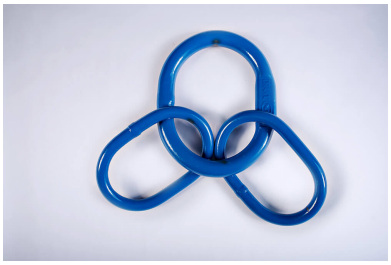

G-100 Master Link With Sub-Assemblies

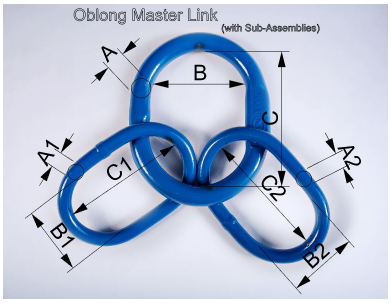

oblong master link w assembly DIM

PACIFIC Industrial Supply

Product Specifications

ALLOY MASTER LINK WITH LARGE SUB ASSEMBLIES (PEERLESS) GRADE 100											
PART NUMBER	SIZE (IN)	SIZE (MM)	WORKING LOAD LIMIT FOR TRIPLE AND QUAD LEG ASSMBLY @ 60 DEGREES (LBS)	DIMENSION (IN)						WEIGHT EA (LBS)	COUNTRY OF ORIGIN
				A	B	C	A1	B1	C1		
PEER-8852100	3/4	20	11,200	0.787	3.74	6.299	0.551	2.756	4.724	6.4	GERMANY
PEER-8852200	7/8	23	14,800	0.906	4.331	6.299	0.63	3.15	5.512	7.4	GERMANY
PEER-8852300	1	27	22,900	1.0633	4.331	7.480	0.787	3.74	6.299	11	GERMANY
PEER-8852400	1-1/4	33	39,000	1.299	5.118	9.055	1.063	4.331	7.480	21	GERMANY
PEER-8852500	1-1/2	38	58,700	1.496	5.906	10.827	1.299	5.118	9.055	25.5	GERMANY
PEER-8852600	1-3/4	45	91,700	1.772	7.087	13.386	1.496	5.906	10.827	61.3	GERMANY
PEER-8852700	2	50	110,900	1.969	7.480	13.780	1.772	7.087	13.386	93.0	GERMANY