


# Alloy Master Link With Large Sub Link Grade 100 (Peerless)

CATALOG (SKU) NUMBER: PEER-8452

- For construction of double, triple, and quadruple rigging slings.
- For use with grade 80 or 100 chain slings, wire rope, and synthetic assemblies.
- Design factor is 4:1.
- Meet or exceed all requirements of ASME B30.26.
- Proof tested in accordance with ASTM A952.
- Available in Chinese import or U.S.A. domestic upon request.



G-100 Master Link With Sub-Assemblies

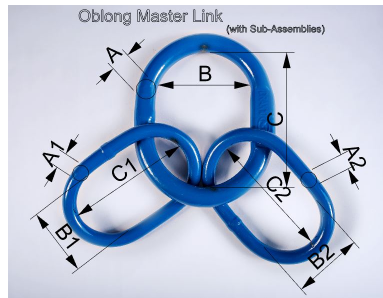

oblong master link w  
assembly DIM

## Product Specifications

ALLOY MASTER LINK WITH LARGE SUB ASSEMBLIES (PEERLESS) GRADE 100											
PART NUMBER	SIZE (IN)	SIZE (MM)	WORKING LOAD LIMIT FOR TRIPLE AND QUAD LEG ASSMBLY @ 60 DEGREES (LBS)	DIMENSION (IN)						WEIGHT EA (LBS)	COUNTRY OF ORIGIN
				A	B	C	A1	B1	C1		
PEER-8852100	3/4	20	11,200	0.787	3.74	6.299	0.551	2.756	4.724	6.4	GERMANY
PEER-8852200	7/8	23	14,800	0.906	4.331	6.299	0.63	3.15	5.512	7.4	GERMANY
PEER-8852300	1	27	22,900	1.0633	4.331	7.480	0.787	3.74	6.299	11	GERMANY
PEER-8852400	1- 1/4	33	39,000	1.299	5.118	9.055	1.0634	4.331	7.480	21	GERMANY
PEER-8852500	1- 1/2	38	58,700	1.496	5.906	10.827	1.2995	5.118	9.055	25.5	GERMANY
PEER-8852600	1- 3/4	45	91,700	1.772	7.087	13.386	1.4965	5.906	10.827	61.3	GERMANY
PEER-8852700	2	50	110,900	1.969	7.480	13.780	1.7727	7.087	13.386	93.0	GERMANY