


# Heavy Duty Galvanized Wire Rope Thimble (Imported)

CATALOG (SKU) NUMBER: HD THIMBLE

- Made From Hot Rolled Mild Steel.
- Used for protection of eye in wire rope sling.
- Commonly used with a shackle.
- Hot dipped galvanized.
- Meets Performance Requirements of Federal Spec FF-T-276B Type III.
- Other sizes available upon request.

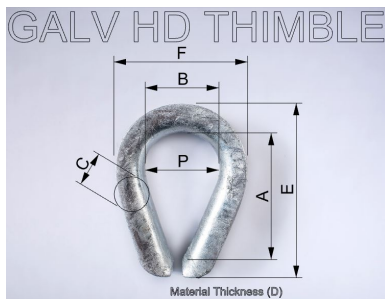

HD galv thimble



HD Wire Rope Thimble

## Product Specifications

HEAVY DUTY GALVANIZED WIRE ROPE THIMBLE (IMPORTED)									
PART NUMBER	WIRE ROPE DIAMETER SIZE (IN)	WEIGHT PER 100 (LBS)	DIMENSIONS (IN)						
			A	B	C	D	E	F	P (PIN)
I51243	1/8	2.00	1.1250	.6250	.1563	.0469	1.4844	1.2344	.6250
I51245	3/16	3.40	1.4375	.6875	.2500	.0469	1.8125	1.5000	.6875
I51250	1/4	6.50	1.6250	.8750	.2813	.0625	2.1250	1.5000	.8125
I51255	5/16	11.80	1.8750	1.0625	.3750	.0781	2.5000	1.8125	.9375
I51260	3/8	21.60	2.1250	1.1250	.4375	.1094	3.0000	2.1250	1.0625
I51265	7/16	34.70	2.3800	1.2500	.4500	.1200	3.2500	2.6250	1.2500
I51270	1/2	51.00	2.7500	1.5000	.6250	.1406	3.6250	2.6875	1.4375
I51275	5/8	75.70	3.2500	1.7500	.6875	.1563	4.2500	3.1250	1.6250
I51280	3/4	158.10	3.7500	2.0000	.8125	.2188	5.0000	3.8125	1.8750
I51285	7/8	177.80	4.2500	2.2500	.9375	.2188	5.5000	4.2500	2.1250
I51290	1	313.90	4.5000	2.5000	1.0625	.2500	6.1250	4.9375	2.3750
I51295	1-1/8-1-1/4	400.00	5.1250	2.8750	1.3125	.2500	7.0000	5.8750	2.7500
I51300	1-1/4-1-3/8	886.00	6.5000	3.5000	-	.3700	9.0800	6.8100	3.5000
I51305	1-3/8-1-1/2	1294.80	6.2500	3.5000	-	.5000	9.0000	7.1200	3.5000